

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 September 2005 (01.09.2005)


PCT

(10) International Publication Number
WO 2005/080750 A1

- (51) International Patent Classification⁷: **E21B 43/32**, 34/06, F03G 7/00
- (21) International Application Number: **PCT/NO2005/000049**
- (22) International Filing Date: 11 February 2005 (11.02.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20040774 20 February 2004 (20.02.2004) NO
- (71) Applicant (for all designated States except US): **NORSK HYDRO ASA** [NO/NO]; N-0240 Oslo (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **AAKRE, Haavard** [NO/NO]; Einaren 48 B, N-3744 Skien (NO).
- (74) Agent: **HOFSETH, Svein**; Patent and Trademark Department, Hydro Aluminium AS, N-0240 Oslo (NO).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (81) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: METHOD AND ACTUATOR DEVICE

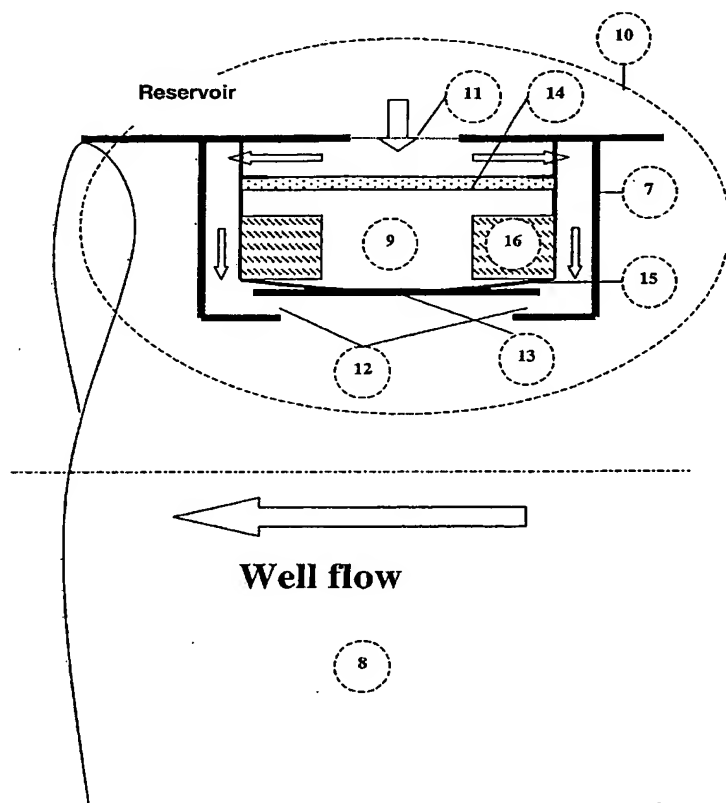

(57) Abstract: A method and a device in connection with an actuator (7) intended for use in connection with a fluid flow or fluid reservoir, in particular an actuator that is designed to be used in connection with a drainage pipe (8) for the production of oil and/or gas in an oil and/or gas reservoir. An osmotic cell (9) is used to operate the actuator (10). The osmotic cell is placed in the fluid flow, whereby the necessary force and motion for the actuator (10) to adjust or drive a fluid control device or valve are achieved by utilising the osmotic pressure difference between the solution in the cell (9) and the external fluid flow/reservoir in relation to the cell.

WO 2005/080750 A1

ATTACHMENT "E"



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*